
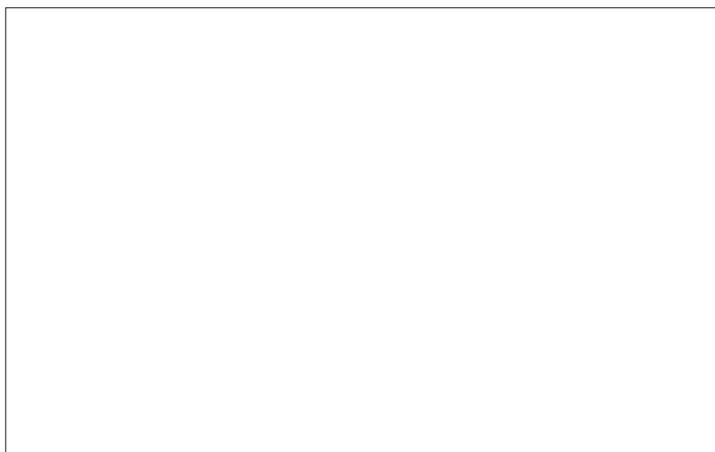


## LED-Anbauprofil BIRO40

**Artikel-Nr. 77143073**

LED-Anbauprofil BIRO40, white, rectangular Lamp holder: LED, Mounting method: Surface mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Acrylic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 31.4W, Luminous flux: 2.430lm, Colour temperature: 3000 K, Light colour : White, Beam angle: 80°, Adjustability: Not adjustable, With control gear: Yes.

<b>Artikel-Nr.</b>	<b>77143073</b>
<b>Stand:</b>	22.07.2021 02:03

control	DALI
Colour	White
Colour of light	3000 K
Glare evaluation	UGR < 25
System efficiency	78 lm/W
Luminous flux	2,430 lm
Material cover	Satinised
Length	1144 mm
Colour rendering	CRI > 90
Beam angle	80 °

Material	Aluminium / Acrylic
Lamp holder	LED
Lamp	LED
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	I
Adjustability	Not adjustable
Width	40 mm
Height	75 mm
Circuit type	Parallel conduction