

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L643090027

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	440 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	4,2	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	30	
	Depth	30	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,414
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	5	Survival factor	0,90
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)-: not applicable;

(b)-: not applicable;

## SPL Spectrum Test Report

Sample :  
 Specification : L643090027  
 Sample No. : 3  
 Manufacturer :


Date : 2021-08-13 08:40:07  
 Sam. Status :  
 Instrument : HaasSuite(EVERFINE)  
 Test by : Renee  
 Assessor : damin

### Test Condition

Temperature : 25.3Deg  
 WL Range : 380nm-780nm  
 Test Mode : Fast Test

RH : 65.0%  
 IP : 49271 (75%)  
 T : 49 ms  
 Sensitivity : High

### Spectrum

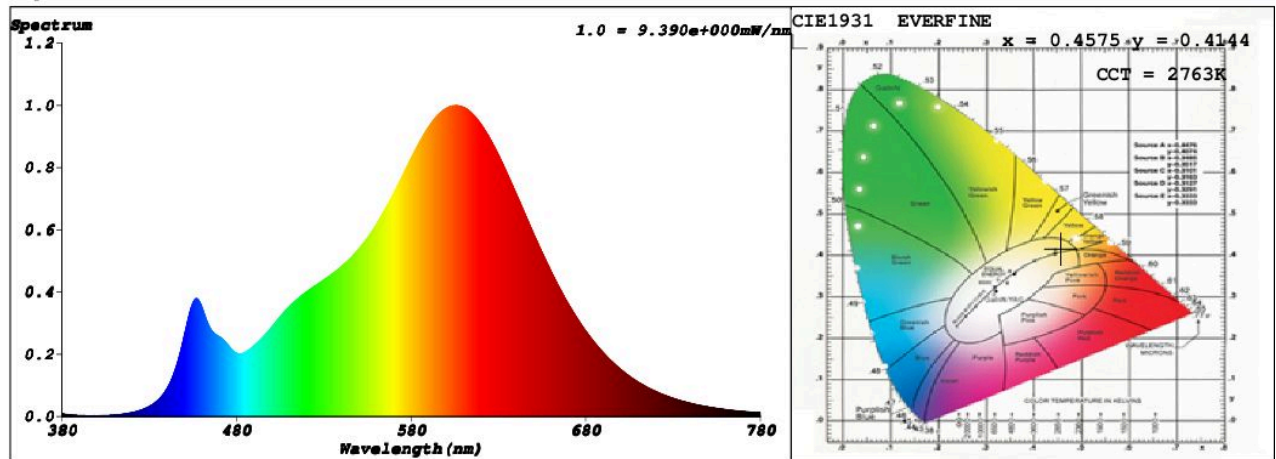

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4575$   $y = 0.4144$  /  $u' = 0.2593$   $v' = 0.5285$  ( $duv=1.62e-03$ )  
 CCT= 2763K Prcp WL:  $L_d=583.4nm$  Purity=61.7%  
 Peak WL:  $L_p=606nm$  FWHM: =114.0nm Ratio:R=24.6% G=72.9% B=2.5%

Render Index:  $R_a = 82.2$

R1 =81 R2 =93 R3 =94 R4 =79 R5 =81 R6 =93 R7 =81  
 R8 =56 R9 =5 R10=84 R11=79 R12=75 R13=84 R14=97 R15=72  
 LEVEL:OUT WHITE:ANSI\_2700K

### Photometric & Radiometric Parameters

Flux = 431.72 lm Eff. : 167.54 lm/W Fe = 1.3129 W

### Electrical parameters

V = 229.8 V I = 0.02134 A P = 2.577 W PF = 0.5254

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)