

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L276310027

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	410 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	100	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	63	
	Depth	63	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,462 0,420
Parameters for directional light sources:			
Peak luminous intensity (cd)	200	Beam angle in degrees, or the range of beam angles that can be set	110
Parameters for LED and OLED light sources:			
R9 colour rendering index value	16	Survival factor	0,70
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9

(a)'.': not applicable;

(b)'.': not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2017-08-08 12:50:49
Specification	:	Sam. Status	:
Sample No.	: L276310027-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Ralf
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52400 (80%)
Test Mode	: Fast Test	T	: 31 ms
		Sensitivity	: High

Spectrum

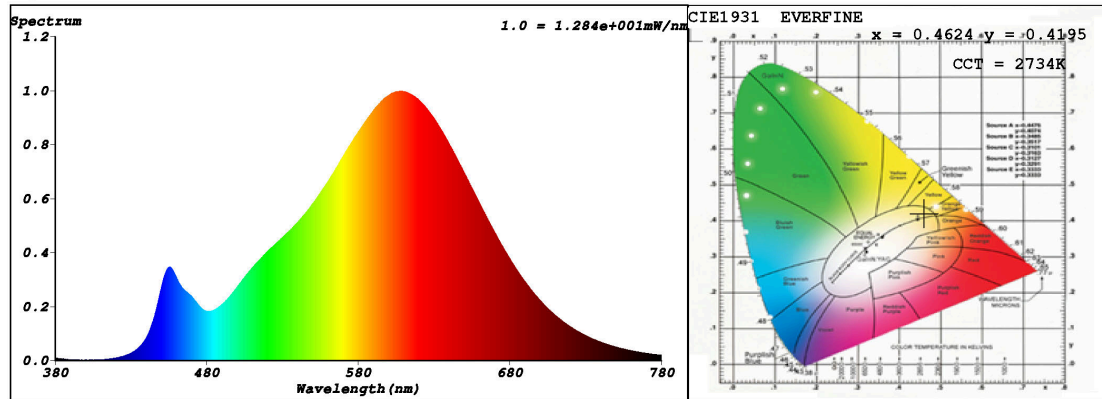

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4624$ $y = 0.4195$ / $u' = 0.2601$ $v' = 0.5311$ ($duv=3.05e-03$)

CCT= 2734K Prcp WL: $L_d=583.1nm$ Purity=64.7%

Peak WL: $L_p=608nm$ FWHM: $=130.2nm$ Ratio:R=24.7% G=73.1% B=2.2%

Render Index: $R_a = 83.2$

R1 =81 R2 =91 R3 =97 R4 =80 R5 =81 R6 =90 R7 =84

R8 =62 R9 =16 R10=80 R11=78 R12=70 R13=83 R14=99 R15=74

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 610.86 lm Eff. : 78.39 lm/W $F_e = 1.9302 W$

Electrical parameters

V = 230.0 V I = 0.06087 A P = 7.793 W PF = 0.5565

Schiefer Professional Lighting

www.professional-lighting.eu