

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L279333230

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	3,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	60	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	27	
	Depth	27	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,400
Parameters for LED and OLED light sources:			
R9 colour rendering index value	9	Survival factor	0,90
the lumen maintenance factor	0,93		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

SPL Spectrum Test Report

Sample : 1-1
 Specification : L279333230
 Sample No. : L279333230 1
 Manufacturer :


Date : 2017-10-30 09:47:14
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by :
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 47619 (73%)
 T : 50 ms
 Sensitivity : High

Spectrum

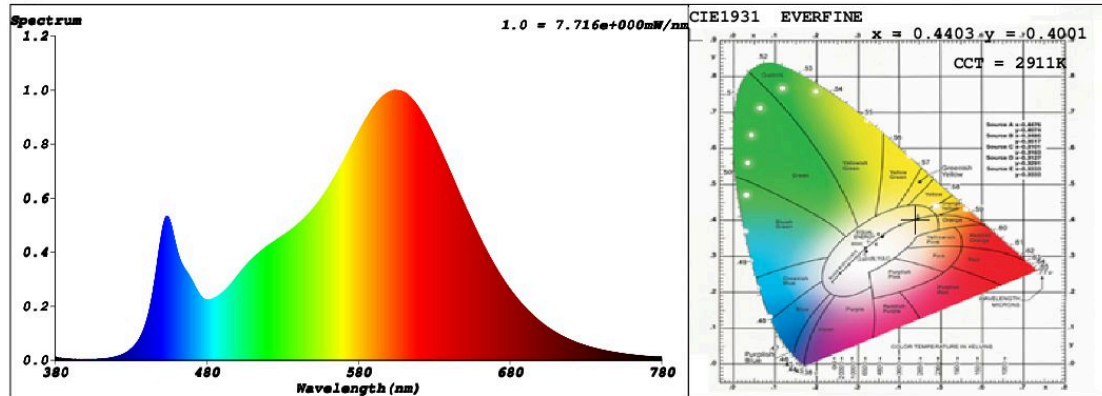

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4403$ $y = 0.4001$ / $u' = 0.2545$ $v' = 0.5203$ ($duv = -2.03e-03$)

CCT= 2911K Prcp WL: $L_d = 583.9\text{nm}$ Purity=52.2%

Peak WL: $L_p = 605\text{nm}$ FWHM: $\approx 117.1\text{nm}$ Ratio: R=23.8% G=73.3% B=2.9%

Render Index: $R_a = 83.0$

R1 =83 R2 =94 R3 =93 R4 =80 R5 =83 R6 =93 R7 =80

R8 =58 R9 =9 R10=86 R11=80 R12=76 R13=86 R14=97 R15=75

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 363.52 lm Eff. : 118.93 lm/W $F_e = 1.1157\text{ W}$

Electrical parameters

V = 219.9 V I = 0.03204 A P = 3.057 W PF = 0.4339

Schiefer Professional Lighting

www.professional-lighting.eu