

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LV023826502

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	140 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	1,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, lighting control	Height	60	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	26	
	Depth	26	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,474 0,412
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	58	Survival factor	0,96
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a)-: not applicable;

(b)-: not applicable;


## SPL Spectrum Test Report

Sample	:	Date	:	2018-11-05 10:04:31
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	
		Assessor	:	damin

### Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	55335 (84%)
Test Mode	:	Fast Test	T	:	154 ms
			Sensitivity	:	High

### Spectrum

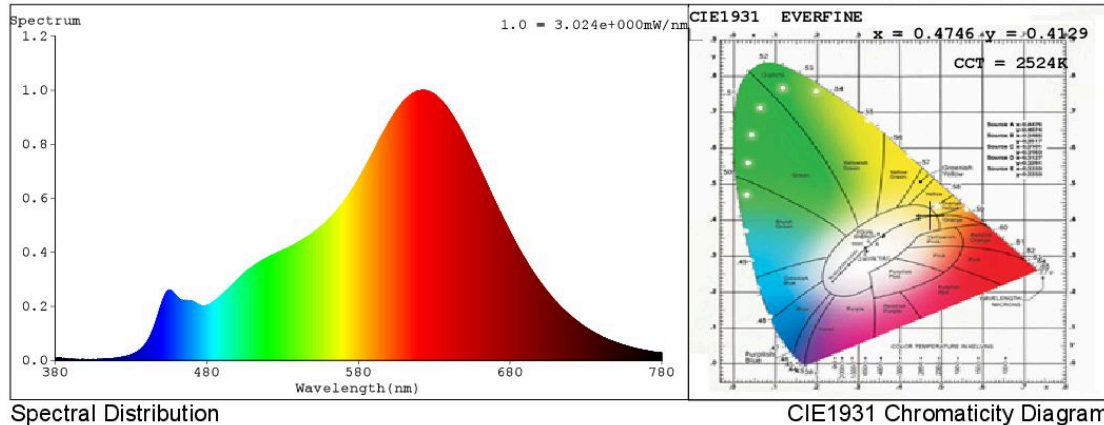

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4746$   $y = 0.4129$  /  $u' = 0.2710$   $v' = 0.5304$  ( $duv = -1.48e-04$ )

CCT= 2524K Prcp WL: Ld=585.2nm Purity=66.4%

Peak WL: Lp=621nm FWHM: =121.4nm Ratio:R=28.5% G=68.9% B=2.6%

Render Index: Ra = 92.7

R1 =96 R2 =99 R3 =94 R4 =95 R5 =97 R6 =94 R7 =88

R8 =79 R9 =58 R10=98 R11=99 R12=88 R13=98 R14=98 R15=89

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 126.84 lm Eff. : 73.31 lm/W Fe = 449.37 mW

### Electrical parameters

V = 230.1 V I = 0.01540 A P = 1.730 W PF = 0.4884

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)