


BLISTO MS OR (metr.)

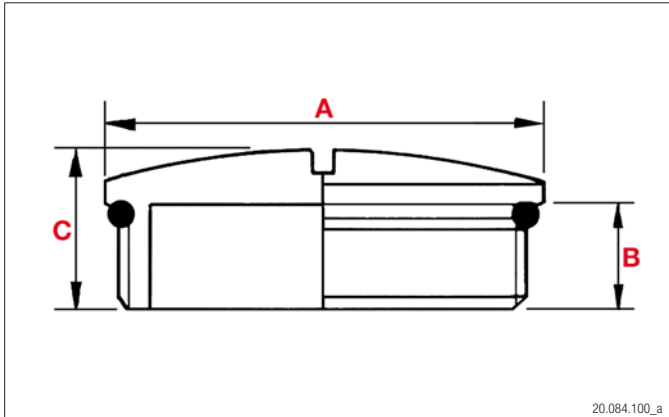

MAT Messing vernickelt
Laiton nickelé
Nickel plated brass

RoHS

TEMP -25°C bis +120°C
-25°C à +120°C
-25°C to +120°C

IP 68 bis 5 bar
IP 68 à 5 bar
IP 68 to 5 bar

NORM EN 60423

Verschlussschraube MS OR

Selbstdichtende Ausführung mit O-Ring 70 Sh A.

Bouchon de fermeture MS OR

Auto-étanchéifiant avec Joint torique 70 Sh A.

Dome plug MS OR

With O-ring 70 Sh A.

	A mm	B mm	C mm			Plica-Nr.	E-Nr.	VE
Kurzgewinde				Filetage court	Short thread			
M6	9	5	8		vernickelt	91.6707.006	126 236 100	50
M8	10	5	8		vernickelt	91.6707.008	126 236 110	50
M10	12	5	8		vernickelt	91.6707.010	126 236 200	50
M12	14	5	7		vernickelt	91.6707.012	126 236 300	50
M16	18	6	8		vernickelt	91.6707.016	126 236 400	50
M20	22	6.5	8.5		vernickelt	91.6707.020	126 236 500	50
M25	27	7	10		vernickelt	91.6707.025	126 236 600	20
M32	34	8	11		vernickelt	91.6707.032	126 236 700	20
M40	44	9	13		vernickelt	91.6707.040	126 236 800	20
M50	54	10	14.5		vernickelt	91.6707.050	126 236 900	10
M63	67	10	15		vernickelt	91.6707.063	126 236 910	5
M75	79	11	16		vernickelt	91.6707.075	126 236 920	1
Langgewinde				Filetage long	Long thread			
M12	14	13	16		vernickelt	91.6709.012		50
M16	18	13	16		vernickelt	91.6709.016		50
M20	22	13	16		vernickelt	91.6709.020		50
M25	27	14	18		vernickelt	91.6709.025		20
M32	34	14.5	18.5		vernickelt	91.6709.032		20
M40	44	14.5	19.5		vernickelt	91.6709.040		20
M50	54	15.5	21		vernickelt	91.6709.050		10
M63	67	16.5	22.5		vernickelt	91.6709.063		5